



Compulite Systems (2000) Ltd.

***Rave***

Version M2.4.R3

---

### **Software Upgrade instructions**

These are instructions on how to upgrade your Rave software to the new version "**M2.4.R3**".

#### **Important:**

- In order for the console to work properly after installing this version you **Must** also upgrade the panel version to **1.45**  
the new panel version is available for download from our web site.
- This installation file is for Floppy Rave console with an **External Monitor ONLY!**  
Floppy Rave console without an external monitor will stop functioning if you attempt to install this version.  
Please backup your shows on the Console before proceeding.

#### **Requirements:**

-  External screen
-  Floppy Diskette

---


9 Hanagar Street, Neve Ne'eman B Industrial Zone, Hod-Hashron, Israel

[www.compulite.com](http://www.compulite.com)

[support@compulite.com](mailto:support@compulite.com)

***Software Upgrade Instructions:***

- Extract the zip file of the new software version,
- Insert an empty floppy diskette into the floppy drive of the PC
- From the extracted folder, copy the files to the floppy diskette. (**Without a folder**)

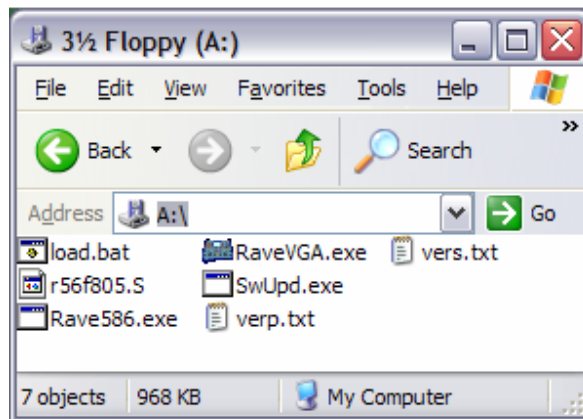

- Eject the floppy diskette from the PC
- Turn ON the console
- Connect an external monitor to the console
- Insert the floppy diskette into the console
- Press **[SETUP, SYSTEM OPTIONS, SW UPGRD, OK]**
- The status of the installation will appear on the small LCD touch screen,
- Wait for the message "Upgrade Successful" to appear.
- Turn OFF the console,
- wait for 1 minute and turn the console power ON again.
- After the console software is running, re enter the "System options" menu to verify that the new version number is updated to "**M2.4.R3**".
- Rave software upgrade is completed.
- Now, please upgrade the panel version to version **1.45**



Compulite Systems (2000) Ltd.

Version M2.4.R3

---

### ***Panel Upgrade Instructions:***

- The new panel files are already on your Floppy diskette, simply press **[SETUP, SYSTEM OPTIONS, PANEL UPGRD, OK]**
- Wait for the Panel upgrade to complete, the small LCD touch screen will prompt to restart the console.
- Turn OFF the console,
- wait for 1 minute and turn the console power ON again.
- When the console start you will see many messages running on the external screen, such as "Data @ 0X### ignored"
- After those messages stops the console software will be loaded normally,
- Restart the console once again,
- After the console software is running, re enter the "System options" menu to verify that the new version number is updated to "**1.45**".

Installation completed.