



***Dlite** USB*

**Compulite Systems (2000) Ltd.**    July 2010

*50.0R04*

---

## **Dlite Software Upgrade instructions**

These are instructions on how to install a new software version on your **Dlite** console.  
Please read the instructions carefully and follow the suggested steps.  
Please read the release notes carefully to learn about the new features and bug fixes.  
If you encounter difficulties or have any questions, do not hesitate to contact us via e-mail at:  
[support@compulite.com](mailto:support@compulite.com)

**ATTENTION:** This software upgrade is suitable for Dlite **USB** console with a **USB** connector **ONLY**.

Trying to run this upgrade on Dlite floppy will cause the console to malfunction.

**NOTE 1:** If your current version is **20.0R4.1**, then you will not be able to upgrade using this procedure. Please contact us via e-mail at: [support@compulite.com](mailto:support@compulite.com) for further instructions on how to upgrade your console from version 20.0R4.1.

**NOTE 2:** It is needed to run the Software upgrade procedure **twice** (as described in the steps below) in order to fully complete the upgrade procedure.

---


9 Hanagar Street, Neve Ne'eman B Industrial Zone, Hod-Hashron, Israel

[www.compulite.com](http://www.compulite.com)

[support@compulite.com](mailto:support@compulite.com)

**SW Upgrade Instructions:**

1. extract the file "50.0R04.zip" on your PC desktop by **right click** on the file and select **EXTRACT ALL**
2. Password is: **USB** (all in BIG letters)
3. a folder will be created on your PC desktop with the new software files in it: (5 files)

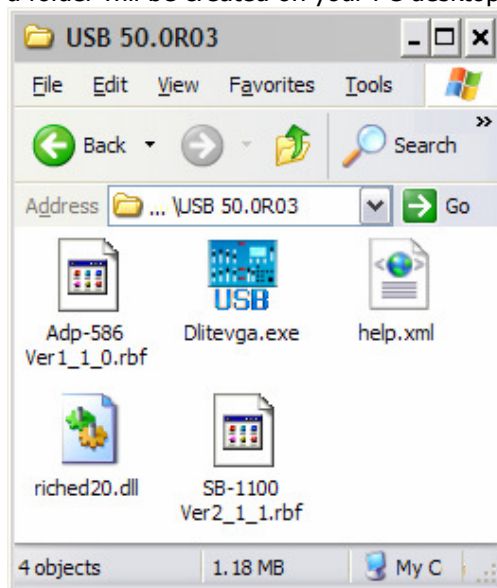

4. Connect a USB stick to your PC with minimum 10 MB of free space.
5. Copy those 5 files to the ROOT dir of the USB stick. (Just the files, without the folder)
6. Disconnect the USB stick from the PC.
7. On the **DLite** console press **SETUP**
8. Tap **System Options**.
9. Tap **SW Upgrade**
10. Connect the USB stick to the **DLite** Console and tap **O.K.**
11. The Console will upgrade the Software version and the LCD will display:

*SW Upgrade Successful!!!*

Then the console will Restart itself.

(In case this take more then 2 minutes, disconnect the USB stick and restart the console manually)

12. After **DLite** application is up and running again



***Dlite** USB*

**Compulite Systems (2000) Ltd.**    July 2010

***50.0R04***

13. Press **SETUP**
14. Tap **System Options** and verify that **50.0R04** is the new SW version presented on the LCD touch screen.
15. Tap **SW Upgrade** to complete the upgrade
16. Connect the USB stick to the console and tap **O.K.**
17. The console will upgrade the Software version ones again with all necessary new files and the LCD will now display:

*Software upgrade: Load Successful*  
*Help File upgrade: Load Successful*

Then the console will Restart itself.

(In case this take more then 2 minutes, disconnect the USB stick and restart the console manually)

18. Verify the new software versions by pressing **SETUP**
19. Tap **System Options**
20. Verify that:
  - a) The Software version is: **50.0R04**
  - b) The Help file version is: **1.0R1**  
In case one of those 2 versions is different please run a SW upgrade ones again.
  - c) The Firmware version is: **2.1.1** or **1.1.0** (depended on the HW type)  
In case the firmware version is different please run a FW upgrade.  
(To do so Tap on the **FW upgrade** button in the **system options** menu, the necessary files are already on your USB stick)

**Dlite** USB Console software upgrade is completed.