



Dlite FLOPPY

Compulite Systems (2000) Ltd.

July 2011

30.0704

Dlite Software Upgrade instructions

These are instructions on how to install a new software version on your **Dlite** console.
Please read the instructions carefully and follow the suggested steps.
Please read the release notes carefully to learn about the new features and bug fixes.
If you encounter difficulties or have any questions, do not hesitate to contact us via e-mail at:
support@compulite.com

ATTENTION: This software upgrade is suitable for Dlite **FLOPPY** console **ONLY**.

NOTE: It is needed to run the Software upgrade procedure **twice** (as described in the steps below) in order to fully complete the upgrade procedure.


9 Hanagar Street, Neve Ne'eman B Industrial Zone, Hod-Hashron, Israel

www.compulite.com

support@compulite.com

SW Upgrade Instructions:

1. extract the file "30.0R04.zip" on your PC desktop by **right click** on the file and select **EXTRACT ALL**
2. Password is: **FLOPPY** (all in BIG letters)
3. a folder will be created on your PC desktop with the new software files in it: (4 files)

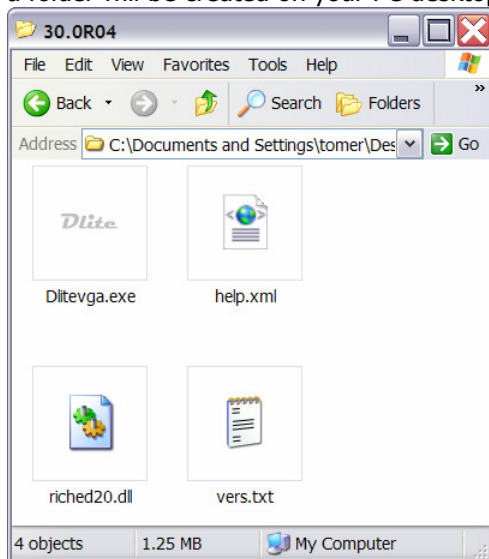

4. Insert a clean Floppy diskette to your PC.
5. Copy those 4 files to the ROOT dir of the Floppy diskette. (Just the files, without the folder)
6. Eject the Floppy diskette from the PC.
7. On the **DLite** console press **SETUP**
8. Tap **System Options**.
9. Tap **SW Upgrade**
10. Insert Floppy diskette to the **DLite** Console and tap **O.K.**
11. The Console will upgrade the Software version and the LCD will display:

SW Ubarade Successful!!!

Then the console will Restart the application by itself.

12. After **DLite** application is up and running again
13. Press **SETUP**



14. Tap **System Options** and verify that **30.0R04** is the new SW version presented on the LCD touch screen.
15. Tap **SW Upgrade** once again to complete the upgrade
16. Make sure the Floppy diskette is still in the console and tap **O.K.**
17. The console will upgrade the Software version ones again with all necessary new files and the LCD will now display:

Software upgrade: Load Successful
Help File upgrade: Load Successful

- Then the console will Restart itself.
(In case this take more then 2 minutes, disconnect the USB stick and restart the console manually)
18. Verify the new software versions by pressing **SETUP**
 19. Tap **System Options**
 20. Verify that:
 - a) The Software version is: **30.0R04**
 - b) The Help file version is: **1.0R1**In case one of those 2 versions is different please run a SW upgrade ones again.

Dlite Floppy Console software upgrade is completed.